



# Formula 65 LED

F65 LED 8W SE LGS24



IP65 waterproof emergency luminaire, with adjustable autonomy and possibility of additional battery.




## Control system CTS-LG24

Order code 32094

EAN 8002219746153

## Technical specifications

Supply voltage type	DC
Absorbed SE (max)	3.8 W
Control system	CTS-LG24
Ambient temperature (min)	-20 °C
Ambient temperature (max)	40 °C
Insulation class	III/II
CCT light tone	4000 K
LED number	32
Photobiological risk	RG0
CRI color rendering	>80
Operation mode	NM/M
Equivalent power	24WGL
Flux SA	400 lm
Flux SE	400 lm
Glow wire strength	850 °C - 30s.
Mounting	Wall, Wire pendulum, Bracket, Short pendulum, Tubular pendulum, angular, Ceiling, Recessed, False Ceiling Recessed, Suspension, Surface/Suspended
Nominal voltage (DC)	24 Vdc
Visibility distance	25 m
Voltage supply range (DC)	24 V +/- 20 %

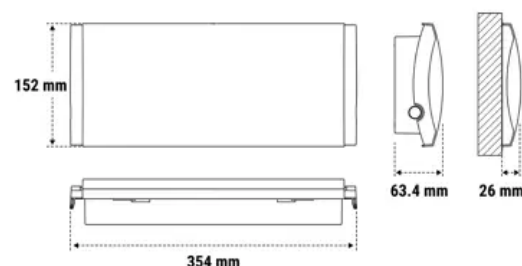


## Installation and applications

Environment	Secondary Areas
Application	Offices, Industrial Areas, Public Areas

## Mechanical specifications

Height	63 mm
Length	152 mm
Width	354 mm
Weight	0.6 Kg
Body material	Polycarbonate
Colour housing	White RAL 9003
Cover material	Transparent polycarbonate
Diffuser finiture	Clear
Reflector material	Polycarbonate
Protection grade IP	IP65
Protection grade IK	IK07

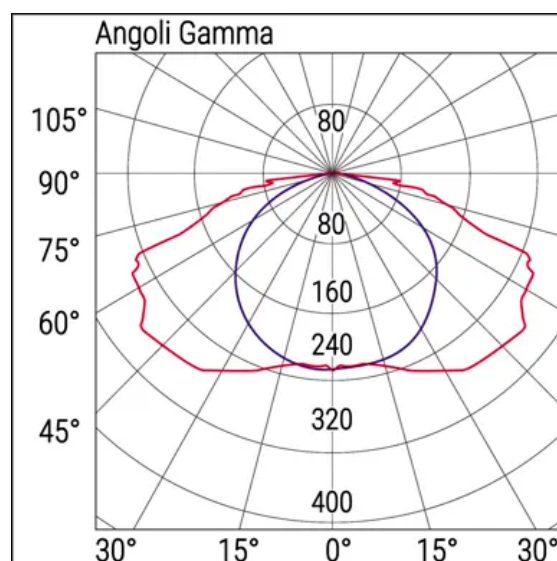

## Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020

### Supplied accessories



**308419000**  
ADES SX/DX/BS/UP F65 LED  
EU

### Accessories



**19041**  
STAFFA CONTROSOFFITTO  
F65



**19049**  
STAFFA CONTROSOFFITTO  
F65 EX



**19042**  
SCHERMO BANDIERA DX/SX  
F65



**3912**  
GRIGLIA EM 440X215X99



**19048**  
SCAT INCASSO + CORNICE  
F65 EX



**19043**  
SCHERMO BANDIERA BASSO  
F65



**19045**  
STAFFA A PARETE X BANDIERA  
F65